



IronArc® 150W Metal Halide UV Lamp

LMP-150S

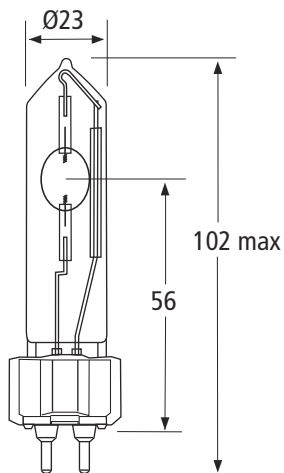

Spectral Distribution

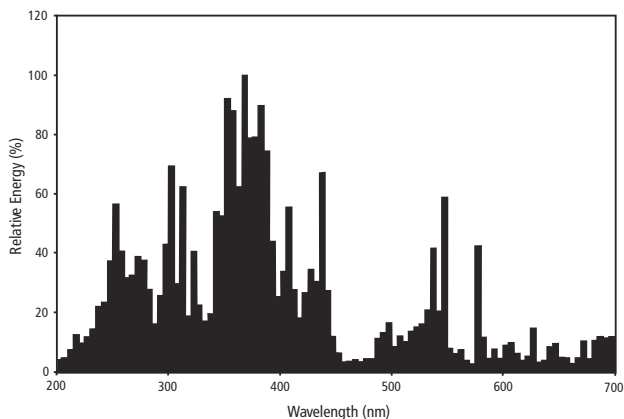

All dimensions are in millimeters

Characteristics

Operating Voltage	95V
Wattage	150W
Current	1.8A
Ignition Voltage	4kV
Spectral Range	300-450nm
UV-A Output (315-400nm)	N/A
UV-B Output (280-315nm)	N/A
Average Life*	4000h
Operating Position	Universal
Bulb Temperature	750/950 °C min/max
Seal Temperature	350 °C (max)
Base	G12

Note:

* Lamp life is strongly affected by the number of starts, operating time per start, operation wattage and the ambient temperature of the lamp

Attention: This lamp generates UV-radiation. Read the safety instructions packed with the lamp carefully. Exposure to unfiltered output can be harmful to eyes and skin. This lamp must be used with suitable operating equipment and in accordance with specified data. Due to the high operating pressure inside the lamp, the possibility exists that in extreme circumstances the lamp might shatter. This lamp should not be operated with a broken or damaged outer envelope

Specifications subject to change without notice or obligation