



**IronArc® 400W Metal Halide UV Lamp**

**LMP-400S**

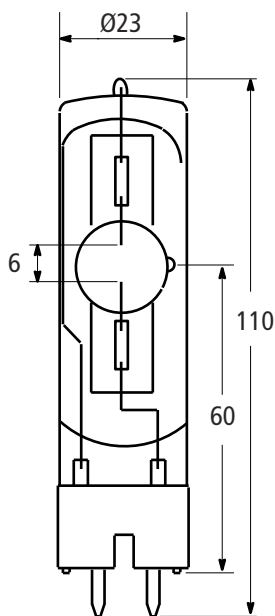

All dimensions are in millimeters

**Spectral Distribution**

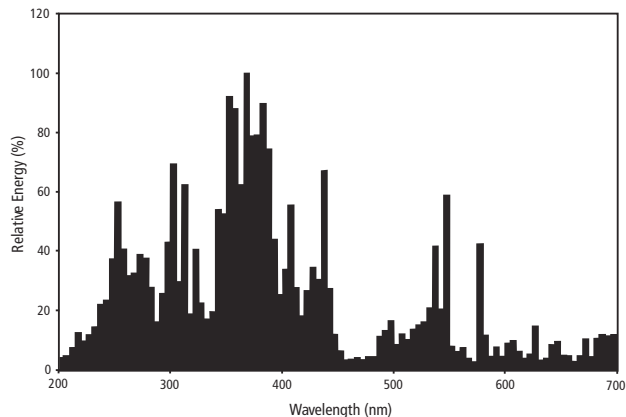

**Characteristics**

Operating Voltage .....	67V
Wattage .....	400W
Current .....	6.9A
Ignition Voltage .....	25kV
Spectral Range .....	300-450nm
UV-A Output (315-400nm) .....	40W
UV-B Output (280-315nm) .....	N/A
Average Life* .....	1000h

Operating Position .....	Universal
Bulb Temperature .....	800 °C (max)
Seal Temperature .....	230 °C (max)
Base .....	GZZ 9.5

**Note:**

\* Lamp life is strongly affected by the number of starts, operating time per start, operation wattage and the ambient temperature of the lamp

**Attention:** This lamp generates UV-radiation. Read the safety instructions packed with the lamp carefully. Exposure to unfiltered output can be harmful to eyes and skin. This lamp must be used with suitable operating equipment and in accordance with specified data. Due to the high operating pressure inside the lamp, the possibility exists that in extreme circumstances the lamp might shatter. This lamp should not be operated with a broken or damaged outer envelope

Specifications subject to change without notice or obligation